

Data sheet

Low pressure transmitter for industrial applications, Type MBS 9200



Compact pressure transmitter programme, MBS 9200 is designed for use in industrial applications e.g. crankcase and turbocharger on industrial engines, filters monitoring as well as applications within level measurement.

The programme covers 4 – 20 mA output signal, gauge versions, pressure span from 40 – 250 mbar as well as bidirectional ranges e.g. –70 – 70 mbar etc.

Excellent vibration stability, robust construction, and a high degree of EMC/EMI protection equip the pressure transmitter to meet the most stringent industrial requirements.

Features

- Compact design
- Full scale span from 40 – 250 mbar as well as bidirectional ranges e.g. –70 – 70 mbar etc (lowest zero point – 100 mbar)
- Digital temperature compensated
- Output signal: 4 – 20 mA
- Excellent shock and vibration robustness
- Reverse polarity protection
- With build-in clipping function and self-diagnostic on request
- Enclosure and wetted parts of stainless steel (AISI 316L)
- Customer specific versions on request
- For use in Zone 2 explosive atmosphere

Technical data
Performance (EN 60770)

| | | | | | | Units |
|---|----------|---------|---------|----------|---------|--------------------------------------|
| Full-scale span (FSS) | 40 | 60 | 100/140 | 150 | 250 | mbar |
| Accuracy @ 25 °C (incl. non-linearity, hysteresis and repeatability) | ≤ ± 2 | ≤ ± 1.5 | ≤ ± 1 | ≤ ± 0.5 | ≤ ± 0.5 | % FSS typ. |
| Non-linearity (BFSL) | ≤ ± 0.2 | ≤ ± 0.2 | ≤ ± 0.2 | ≤ ± 0.2 | ≤ ± 0.2 | % FSS |
| Hysteresis and repeatability | ≤ ± 0.1 | ≤ ± 0.1 | ≤ ± 0.1 | ≤ ± 0.1 | ≤ ± 0.1 | % FSS |
| Total error band (TEB) within compensated temperature range | ≤ ± 5 | ≤ ± 3 | ≤ ± 2 | ≤ ± 1.5 | ≤ ± 1.5 | % FSS |
| Mounting position error for 180° rotation | ≤ ± 1.25 | ≤ ± 0.8 | ≤ ± 0.5 | ≤ ± 0.35 | ≤ ± 0.2 | % FSS |
| Overload pressure (static) | 3.5 | 3.5 | 3.5 | 3.5 | 3.5 | bar |
| Burst pressure | 50 | 50 | 50 | 50 | 50 | bar |
| Response time | | | | | | < 2 ms |
| Resolution | | | | | | Infinite |
| Durability P: 10 – 90% FS | | | | | | 10 × 10 ⁶ pressure cycles |

Full-Scale Span (FSS) is the difference between the upper limit and the lower limit of the pressure range. (e.g. for pressure range - 30 to 30 mbar, FSS = 30 - (-30) = 60 mbar.

Electrical specifications

| | |
|--|--|
| Nom. output signal (short circuit protected) | 4 – 20 mA |
| Supply voltage [U ₈], reverse polarity protected | 9 – 32 V d.c. |
| Supply voltage dependency | < ± 0.05% FSS / 10 V |
| Load [R _L] (load connected to 0 V) | R _L ≤ (U ₈ - 8 V) / 0.02 A |

Environmental specifications

| | | |
|---------------------------------------|--|-------------------------------------|
| Sensor temperature range | Normal | -40 – 85 °C |
| | Atex Zone 2 | 20 – 85 °C ¹⁾ |
| Media temperature range ¹⁾ | -25 – 100 °C | |
| Ambient temperature range | See page 3 | |
| Compensated temperature range | 0 – 80 °C | |
| Transport / storage temperature range | -40 – 125 °C | |
| EMC - Emission | EN 61000-6-3 and EN61236-1 | |
| EMC Immunity | EN 61000-6-2 and EN61236-1 | |
| Vibration stability | Sinusoidal | 15.9 mm-pp, 2 Hz – 25 Hz |
| | | 20 g, 25 Hz – 2 kHz |
| Shock resistance | Random | 7.5 g _{rms} , 5 Hz – 1 kHz |
| | Shock | 500 g / 1 ms |
| | Free fall | 1 m |
| | Enclosure (depending on electrical connection) | See page 3 |

Explosive atmospheres

| | | |
|-----------------------------------|---|-----------------------|
| Zone 2 applications ¹⁾ | II 3G Ex nA IIA T3 Gc -20C<Ta<+85C | EN60079-0; EN60079-15 |
|-----------------------------------|---|-----------------------|

¹⁾When used in ATEX Zone 2 areas at temperatures <-10 °C the cable and plug must be protected against impact.

Mechanical specifications

| | |
|-------------------------|-------------------------------|
| Net weight | 0.2 – 0.3 kg |
| Electrical connector | See page 3 |
| Pressure connection | see page 3 |
| Materials, wetted parts | EN 10088; 1.4404 (AISI 316 L) |

¹⁾ Depending gasket material

FPM: -20 – 100 °C

NBR: -25 – 85 °C

Dimensions / Combinations

| | | | | |
|---|---|--|--|--|
| Type code: Electrical connection | 1 | | 2 | |
| | EN 175301-803-A, Pg 9 | | EN 175301-803-A, Pg 11 | |
| | | | | |
| | | | | |
| Type code: Pressure connection | FA09 DIN 3852-E-M14 x1.5, Gasket: DIN 3869-14 | GB08 DIN 3852-E-G¼ Gasket: DIN 3869-14 | GB04 DIN 3852-E-G½ Gasket: DIN 3869-21 | |
| Recommended torque: | 20 – 25 Nm | | | |


Electrical connection

| | | |
|--|--|--|
| Type code: | 0 and 1, 2 | |
| | EN 175301-803-A, | |
| | | |
| Ambient temperature | -25 – 100 °C | |
| Enclosure | IP65 | |
| Materials | Glass filled polyamid, PA 6.6 | |
| Electrical connection 4 –20 mA (2 wire) | Pin 1: + supply Pin 2: - supply Pin 3: Not used Earth: Connected to transmitter enclosure | |


For proper ventilation of atmospheric reference pressure a vented cable is recommended.

Recommended mounting position

Error due to different mounting than recommended can be eliminated by zeroing in user hardware

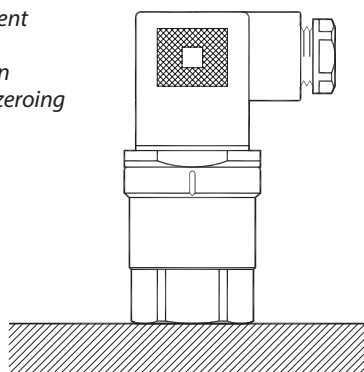

See mounting position error for 180° rotation on page 2

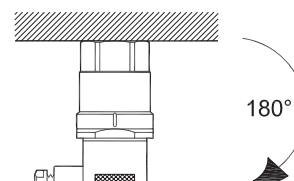

Ordering

| | | |
|---------------------------|-----|---|
| Type 9200 | | 1 1 - |
| Pressure range | | |
| -20 – 20 mbar | A 1 | |
| -30 – 30 mbar | A 2 | |
| -70 – 70 mbar | A 3 | |
| 0 – 40 mbar | B 1 | |
| 0 – 60 mbar | B 2 | |
| 0 – 100 mbar | B 3 | |
| 0 – 150 mbar | B 4 | |
| 0 – 250 mbar | B 5 | |
| Pressure reference | | |
| Gauge (relative) | 1 | |
| Output signal | | |
| 4 – 20 mA | 1 | |
| | | Gasket |
| | | 1 Gasket, FPM |
| | | 2 Gasket, NBR |
| | | Pressure connection |
| | | G B 0 8 DIN 3852-E-G1/2, gasket DIN 3869-21 |
| | | G B 0 4 DIN 3852-E-G1/4, gasket DIN 3869-14 |
| | | F A 0 9 DIN 3852-E-M14 x1.5, gasket DIN 3869-14 |
| | | Electrical connection |
| | | 0 No plug (EN175301-803-A) |
| | | 1 Plug Pg 9 (EN 175301-803-A) |
| | | 2 Plug Pg 11 (EN 175301-803-A) |

Non-standard build-up codes on request. However, minimum order quantities may apply. Please contact your local Danfoss office for further information.