


V2000UB UBG type TRV Body RADIATOR VALVE WITH UNLIMITED CARTRIDGE

PRODUCT DATA

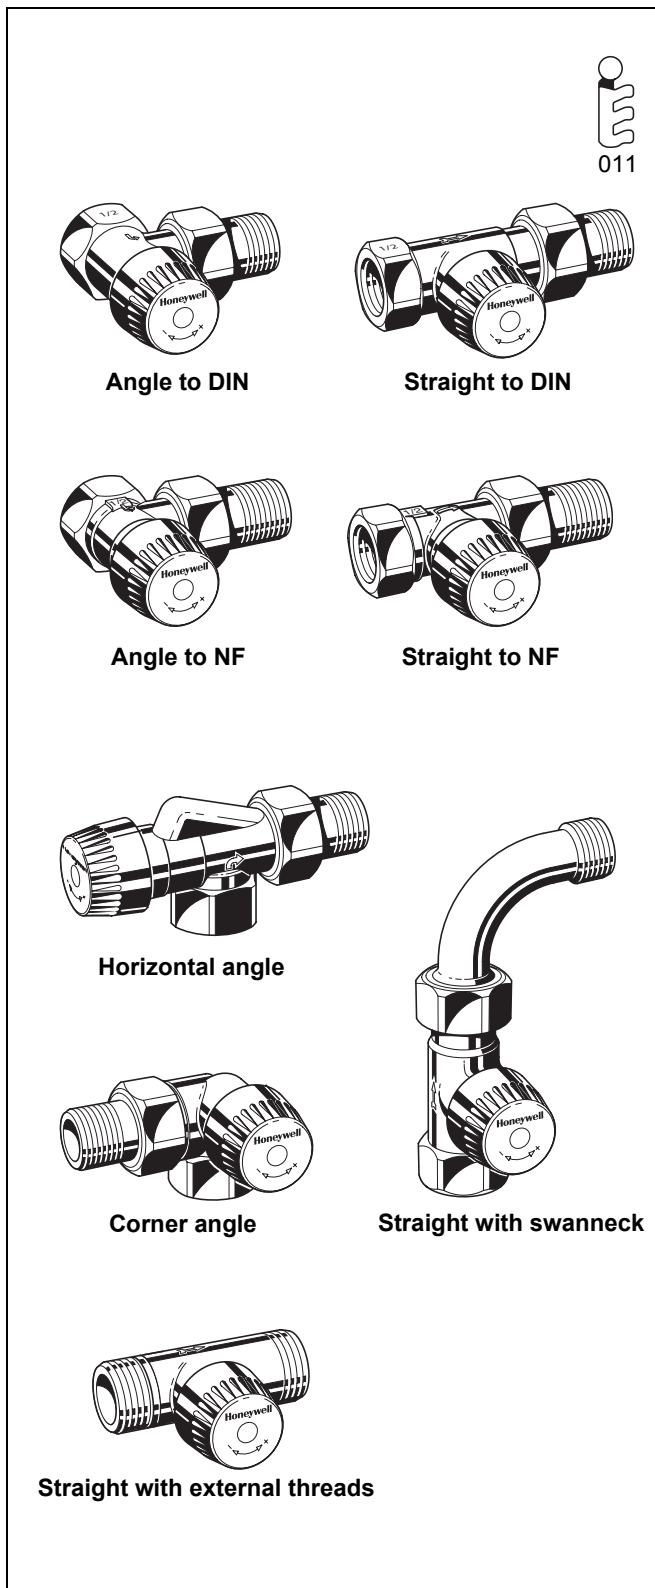

Application

Thermostatic radiator valve bodies (TRV bodies) are fitted on the supply or return of radiators or heat exchangers. Together with a radiator thermostat, for example the Thera-4, they control the room temperature by regulating the flow of hot water into the radiator or heat exchanger. The temperature of different rooms is controlled individually and energy is saved.

TRV bodies of this type have quiet operation and are fitted to the supply of radiators in one-pipe systems or in two-pipe systems with medium to high flow rates.

The valve insert can be replaced while the system is running and without draining using the service tool (see 'Accessories').

TRV bodies of this type are suitable for

- Honeywell radiator thermostats with M30 x 1.5 connection
- Certain Honeywell MT4 actuators
- Honeywell Hometronic HR80 and Roomtronic HR40 actuators

AT-Concept

AT-Concept valves share the same valve housing design. The valve insert can be replaced by any other AT-Concept valve insert, i.e. BB, KV, UBG, SL, VS, FS, FV and SC.

Features

- For one-pipe heating systems and two-pipe systems with medium to high flow rates
- Quiet operation
- DIN type bodies with dimensions according to EN215, Appendix A, Series D
- NF type bodies with dimensions according to EN215, Appendix A, Series F
- AT-Concept valve housing and insert
- Valve insert can be replaced while system is operating and without draining the system
- Valve opening spring is not in the water
- Standard M30 x 1.5 thermostat connection
- Supplied with white protection cap for clear identification

Design

The thermostatic radiator valve body consists of:

- Valve housing PN10, DN10, 15, 20 or 25 with
 - internal thread connection to DIN2999 (ISO7) for threaded, copper or precision steel pipe on inlet (compression ring fittings see 'Accessories')
 - external thread connection with union-nut and radiator tail-piece on outlet¹ (Eurocone for DN15) or
 - external thread connections on inlet and outlet, without union-nut and radiator tailpiece
 - angle to DIN and straight to DIN bodies with dimensions according to EN215, Appendix A, Series D
 - angle to NF and straight to NF bodies with dimensions according to EN215, Appendix A, Series F
- Valve insert with UBG (unlimited flow) type cartridge
- Protection cap
- Union-nut and radiator tailpiece

Materials

- Valve housing made of nickel-plated hot-forged brass
- Valve insert made of brass with EPDM O-rings and soft seals and stainless steel spindle
- Protection cap made of white plastic
- Union-nut and tailpiece made of nickel-plated brass

Please note:

- To avoid stone deposit and corrosion the composition of the medium should conform with VDI-Guideline 2035
- Additives have to be suitable for EPDM sealings
- System has to be flushed thoroughly before initial operation with all valves fully open
- Any complaints or costs resulting from non-compliance with above rules will not be accepted by Honeywell
- Please contact us if you should have any special requirements or needs

Specifications

| | |
|--|--|
| Medium | Heating water, water quality to VDI2035 |
| Operating temperature | max. 130°C (266°F) |
| Operating pressure | PN10 |
| Differential pressure | max. 100kPa (1 bar, 14.5 psi) – max. 20 kPa (0.2 bar, 2.9 psi) recommended for quiet operation |
| K_{vs} (C_{vs})-value | 0.8...2.5 (0.94...2.93) depending on type of valve body (see „Dimensions“) |
| Nominal flow | 190 kg/h |
| Body-head connection | M30 x 1.5 |
| Closing dimension | 11.5 mm |
| Stroke | 2.5 mm |

Identification

- White protection cap
- Brass insert

Function

Thermostatic radiator valves enable individual control of room temperature and thus save energy.

The TRV body is controlled by the radiator thermostat. Air from the room passing over the sensor of the radiator thermostat causes the sensor to expand when the temperature rises. The sensor acts onto the valve spindle and this causes the TRV body to close. When the temperature falls the sensor contracts and the spring-loaded valve spindle is opened. The TRV opens in proportion to the temperature of the sensor. Only the amount of water required to maintain the room temperature set on the radiator thermostat can flow into the radiator.

Installation Examples




Fig. 1. Angle




Fig. 2. Straight

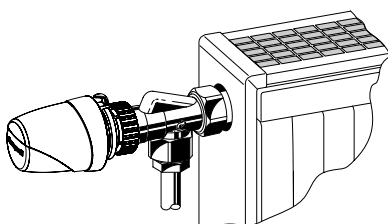


Fig. 3. Horizontal angle




Fig. 4. Corner angle left




Fig. 5. Straight with swanneck

Dimensions and Ordering Information




Fig. 6. Angle

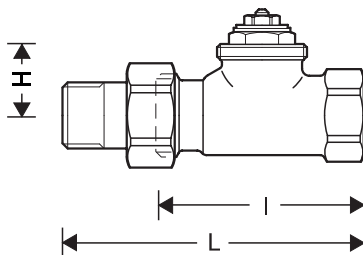


Fig. 7. Straight




Fig. 8. Straight with external threads

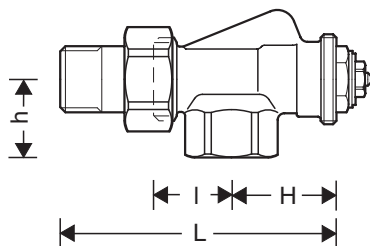


Fig. 9. Horizontal angle

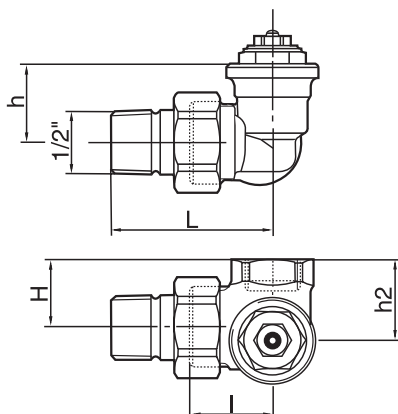


Fig. 10. Corner angle left

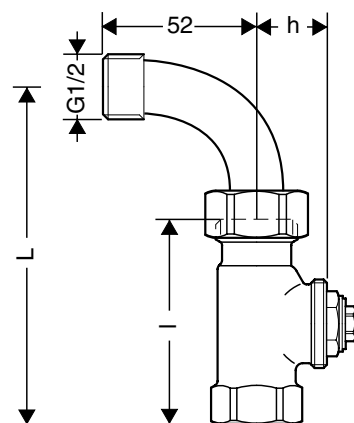


Fig. 11. Straight with swanneck

Table 1. Dimensions and OS-Nos (OS=Ordering System)


| Body type | DN | EN215 certified | kvs(Cvs)-value | Pipe connection | I | L | h | H | h ₂ | OS-No. |
|---|----|-----------------|----------------|-----------------|------|-------|----|----|----------------|------------|
| For the supply | | | | | | | | | | |
| Angle to EN215 (D) (Fig. 6) | 10 | • | 1.70 (1.99) | Rp 3/8" | 26 | 52 | 22 | 20 | — | V2000EUB10 |
| | 15 | • | 1.85 (2.16) | Rp 1/2" | 29 | 58 | 26 | 20 | — | V2000EUB15 |
| | 20 | • | 1.95 (2.28) | Rp 3/4" | 34 | 66 | 29 | 19 | — | V2000EUB20 |
| | 25 | • | 2.20 (2.57) | Rp1" | 41.5 | 73 | 33 | 26 | — | v2000EUB25 |
| Straight to EN215 (D) (Fig. 7) | 10 | • | 1.45 (1.69) | Rp 3/8" | 59 | 85 | — | 25 | — | V2000DUB10 |
| | 15 | • | 1.85 (2.16) | Rp 1/2" | 66 | 95 | — | 25 | — | V2000DUB15 |
| | 20 | • | 1.95 (2.28) | Rp 3/4" | 74 | 106 | — | 25 | — | V2000DUB20 |
| | 25 | • | 2.20 (2.57) | Rp1" | 80 | 112.5 | — | 30 | — | V2000DUB25 |
| Angle to EN215 (F) (Fig. 6) | 10 | • | 1.80 (2.11) | Rp 3/8" | 24 | 49 | 20 | 21 | — | V2020EUB10 |
| | 15 | • | 1.80 (2.11) | Rp 1/2" | 26 | 53 | 23 | 22 | — | V2020EUB15 |
| | 20 | • | 1.95 (2.28) | Rp 3/4" | 34 | 66 | 29 | 18 | — | V2020EUB20 |
| Straight to EN215 (F) (Fig. 7) | 15 | • | 1.10 (1.29) | Rp 1/2" | 55 | 82 | — | 26 | — | V2020DUB15 |
| Horizontal angle (Fig. 9) | 10 | | 1.20 (1.40) | Rp 3/8" | 24 | 50 | 22 | 33 | — | V2000AUB10 |
| | 15 | | 1.20 (1.40) | Rp 1/2" | 26 | 54 | 26 | 35 | — | V2000AUB15 |
| Corner angle, radiator connection left (Fig. 10) | 10 | | 1.00 (1.17) | Rp 3/8" | 24 | 53 | 26 | 22 | 26.5 | V2000LUB10 |
| | 15 | | 1.00 (1.17) | Rp 1/2" | 24 | 53 | 26 | 26 | 30.5 | V2000LUB15 |
| Corner angle, radiator connection right (Fig. 10) | 10 | | 1.00 (1.17) | Rp 3/8" | 24 | 53 | 26 | 22 | 26.5 | V2000RUB10 |
| | 15 | | 1.00 (1.17) | Rp 1/2" | 24 | 53 | 26 | 26 | 30.5 | V2000RUB15 |
| Swanneck (Fig. 11) | 15 | | 1.60 (1.87) | Rp 1/2" | 66 | 108 | 25 | — | — | V2000BUB15 |
| For the supply or return | | | | | | | | | | |
| Straight with external threads (Fig. 8) | 15 | | 1.60 (1.87) | G 3/4" A | 66 | — | 25 | — | — | V2060DUB15 |

NOTE: All dimensions in mm unless stated otherwise.

Accessories

Pipe Connections

Compression fitting for COPPER and STEEL pipe.
 Consisting of compression nut and compression ring.
 For valves with internal thread.




| Valve size | Pipe dimension | Part number | Pcs/ pack |
|-------------|----------------|---------------|-----------|
| 3/8" (DN10) | 10 mm | FIG3/8CS10 | 1 |
| 3/8" (DN10) | 12 mm | FIG3/8CS12 | 1 |
| 1/2" (DN15) | 10 mm | FIG1/2CS10 | 1 |
| 1/2" (DN15) | 12 mm | FIG1/2CS12 | 1 |
| 1/2" (DN15) | 14 mm | FIG1/2CS14 | 1 |
| 1/2" (DN15) | 15 mm | FIG1/2CS15 | 1 |
| 1/2" (DN15) | 15 mm | FIG1/2CS15-10 | 10 |
| 1/2" (DN15) | 16 mm | FIG1/2CS16 | 1 |
| 3/4" (DN20) | 18 mm | FIG3/4CS18 | 1 |
| 3/4" (DN20) | 22 mm | FIG3/4CS22 | 1 |

NOTE: Support inserts have to be used for copper or soft steel pipe with 1.0 mm wall thickness. Max. operating temperature 120°C, max. operating pressure 10 bar.

Compression fitting for COPPER and SOFT STEEL pipe.
 Consisting of compression nut, compression ring and support insert.

For valves with internal thread.




| Valve size | Pipe dimension | Part number | Pcs/ pack |
|-------------|----------------|-------------|-----------|
| 3/8" (DN10) | 12 mm | FIG3/8CSS12 | 1 |
| 1/2" (DN15) | 12 mm | FIG1/2CSS12 | 1 |
| 1/2" (DN15) | 14 mm | FIG1/2CSS14 | 1 |
| 1/2" (DN15) | 15 mm | FIG1/2CSS15 | 1 |
| 1/2" (DN15) | 16 mm | FIG1/2CSS16 | 1 |
| 1/2" (DN15) | 18 mm | FIG1/2CSS18 | 1 |
| 3/4" (DN20) | 18 mm | FIG3/4CSS18 | 1 |

NOTE: Support inserts have to be used for copper or soft steel pipe with 1.0 mm wall thickness. Max. operating temperature 120°C, max. operating pressure 10 bar.

Compression fitting for MULTILAYER pipe.

Consisting of compression nut, compression ring and support insert.

For valves with internal thread.




| Valve size | Pipe dimension | Part number | Pcs/ pack |
|-------------|----------------|-------------|-----------|
| 1/2" (DN15) | 16 mm | FIG1/2M16X2 | 1 |

NOTE: Max. operating temperature 90°C, max. operating pressure 10 bar.

Compression fitting for COPPER and STEEL pipe.
 Consisting of one-piece (preassembled) nut.
 Soft sealing connection.

For valves with external thread G3/4".



| Connection | Pipe dimension | Part number | Pcs/ pack |
|------------|----------------|---------------|-----------|
| G3/4" | 10 mm | FEG3/4CS10 | 1 |
| G3/4" | 12 mm | FEG3/4CS12 | 1 |
| G3/4" | 14 mm | FEG3/4CS14 | 1 |
| G3/4" | 14 mm | FEG3/4CS14-10 | 10 |
| G3/4" | 15 mm | FEG3/4CS15 | 1 |
| G3/4" | 15 mm | FEG3/4CS15-10 | 10 |
| G3/4" | 16 mm | FEG3/4CS16 | 1 |
| G3/4" | 18 mm | FEG3/4CS18 | 1 |


NOTE: Reinforcing insert for copper or soft steel pipe with 1,0 mm wall thickness not required. Max. operating temperature 90°C, max. operating pressure 10 bar.

Compression fitting for PEX pipe.

Consisting of one-piece (preassembled) nut and reinforcing insert.

Soft sealing connection.

For valves with external thread G3/4".




| Connection | Pipe dimension | Part number | Pcs/ pack |
|------------|----------------|---------------|-----------|
| G3/4" | 12x1,1 mm | FEG3/4P12X1.1 | 1 |
| G3/4" | 16x1,5 mm | FEG3/4P16X1.5 | 1 |

NOTE: Max. operating temperature 90°C, max. operating pressure 10 bar.

Compression fitting for PEX and MULTILAYER pipe.

Consisting of one-piece nut with preassembled anti-torsion elastic compression ring and one-piece reinforcing insert.

For valves with external thread G3/4".



| Connection | Pipe dimension | Part number | Pcs/ pack |
|------------|----------------|-----------------|-----------|
| G3/4" | 14x2 mm | FEG3/4PM14X2 | 1 |
| G3/4" | 16x2 mm | FEG3/4PM16X2 | 1 |
| G3/4" | 16x2 mm | FEG3/4PM16X2-10 | 10 |
| G3/4" | 16x2.2 mm | FEG3/4PM16X2.2 | 1 |
| G3/4" | 17x2 mm | FEG3/4PM17X2 | 1 |
| G3/4" | 17x2 mm | FEG3/4PM17X2-10 | 10 |
| G3/4" | 18x2 mm | FEG3/4PM18X2 | 1 |
| G3/4" | 18x2 mm | FEG3/4PM18X2-10 | 10 |
| G3/4" | 20x2 mm | FEG3/4PM20X2 | 1 |

NOTE: Max. operating temperature 90°C, max. operating pressure 10 bar.

Reduction piece




| | |
|--------------------------|------------|
| 1" pipe > 1/2" valve | VA6290A260 |
| 1 1/4" pipe > 1/2" valve | VA6290A280 |
| 1" pipe > 3/4" valve | VA6290A285 |
| 1 1/4" pipe > 3/4" valve | VA6290A305 |

Radiator tailpiece with thread up to collar



| | |
|------------------------|------------|
| for valves DN10 (3/8") | VA5201A010 |
| for valves DN15 (1/2") | VA5201A015 |
| for valves DN20 (3/4") | VA5201A020 |

Extended radiator tailpiece, nickel-plated, to be shortened as required



| | |
|---|------------|
| 3/8" x 70 mm (for DN10) thread approx. 50 mm | VA5204B010 |
| 1/2" x 76 mm (for DN15) thread approx. 65 mm | VA5204B015 |
| 3/4" x 70 mm (for DN20) thread approx. 60 mm | VA5204B020 |

Valve Accessories

Manual handwheel cap



Pre-settable, with integrated locking device VA2200D001

Pressure cap – for shutting off valves on radiator outlet




| | |
|------------------------|------------|
| for valves DN10 (3/8") | VA2202A010 |
| for valves DN15 (1/2") | VA2202A015 |
| for valves DN20 (3/4") | VA2202A020 |

Sealing ring for pressure cap



| | |
|------------------------|------------|
| for valves DN10 (3/8") | VA5090A010 |
| for valves DN15 (1/2") | VA5090A015 |
| for valves DN20 (3/4") | VA5090A020 |

Service tool to replace valve insert




for all sizes VA8200A001

Replacement valve insert



UBG type VS1200UB01

Flow Diagram

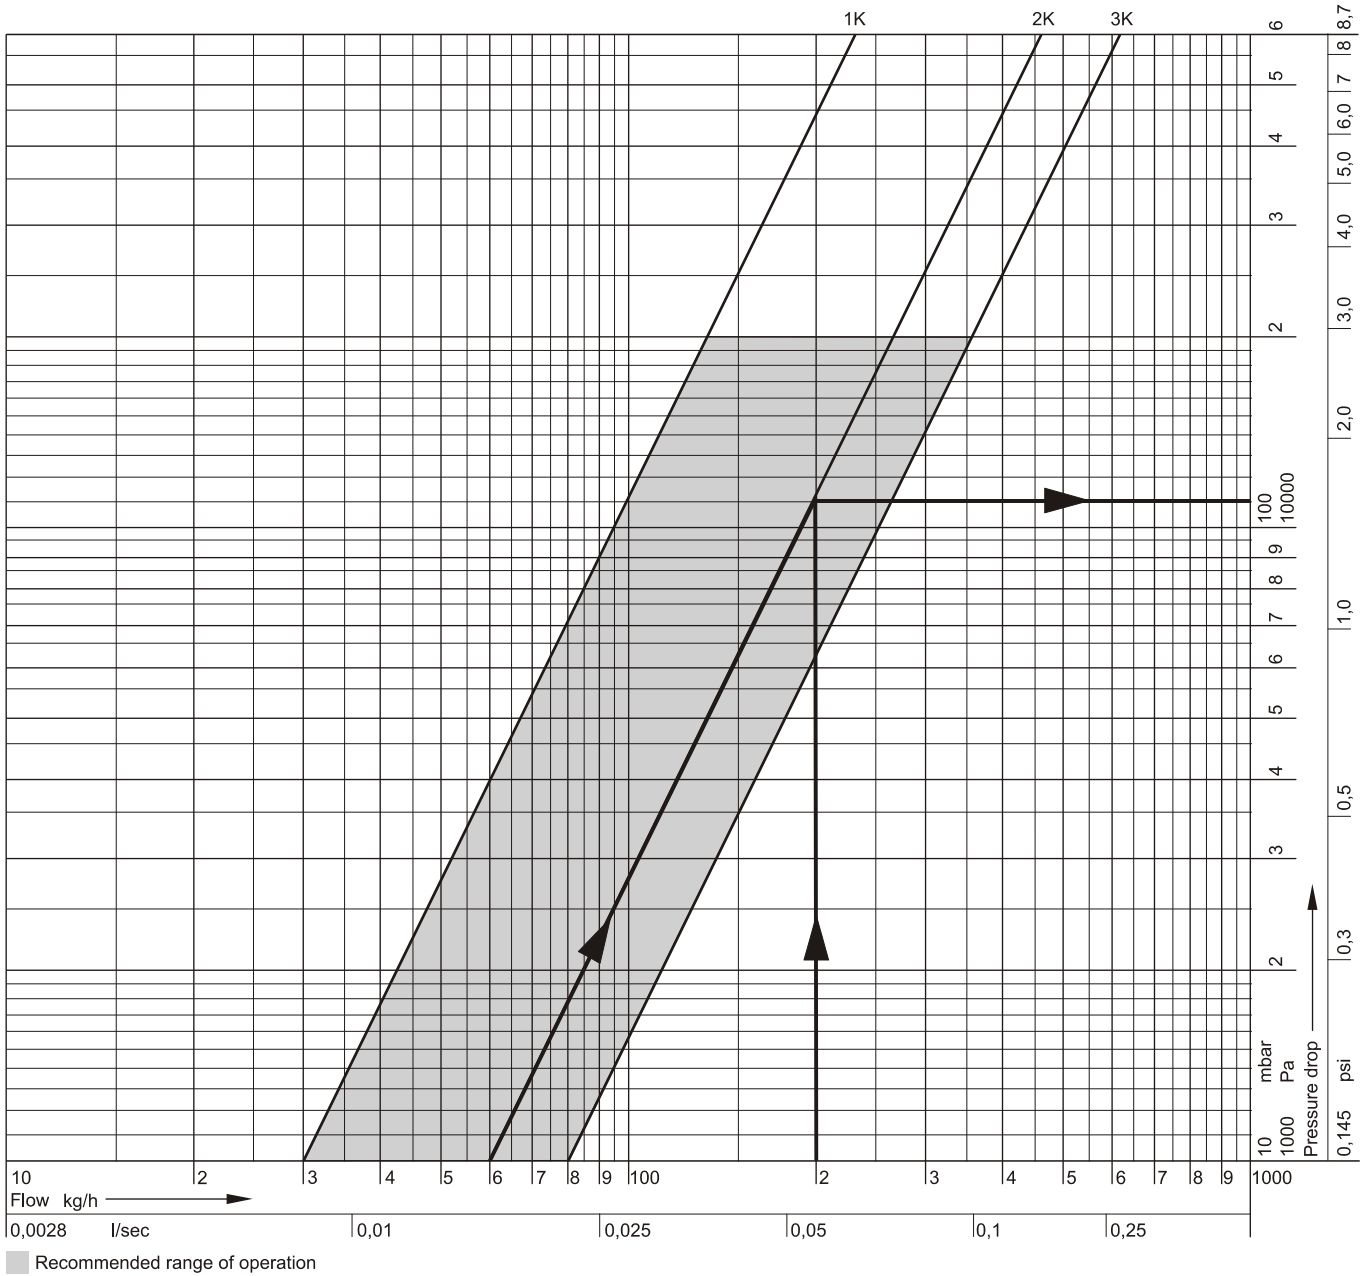

| P-Band | 1K | 2K | 3K |
|----------------------------|------|------|------|
| k_v-value | 0.3 | 0.6 | 0.8 |
| cv-value | 0.35 | 0.70 | 0.94 |

Design Example

Given: Flow rate 200 kg/h
 Required: Pressure loss (Δp) with a P-band of 2K
 Solution: The required pressure loss is found at the intersection of the flow line with the line for the chosen valve performance P=2K
 Result: $\Delta p = 110 \text{ mbar} = 11\,000 \text{ Pa}$

NOTE: k_{vs} (cv)-values: see Table k_{vs} -(cv)-values

 k_{vs} (cv)-values

| | DN10 (3/8") | DN15 (1/2") | DN20 (3/4") | DN25 (1") |
|--------------------------------|--------------------|--------------------|--------------------|------------------|
| Angle to EN215 (D) | 1.70 (1.99) | 1.85 (2.16) | 1.95 (2.28) | 2.20 (2.57) |
| Straight to EN215 (D) | 1.70 (1.99) | 1.85 (2.16) | 1.95 (2.28) | 2.20 (2.57) |
| Angle to EN215 (F) | 1.80 (2.11) | 1.80 (2.11) | 1.95 (2.28) | — |
| Straight to EN215 (F) | 0.80 (0.94) | 1.10 (1.29) | 1.95 (2.28) | — |
| Horizontal angle | 1.20 (1.40) | 1.20 (1.40) | — | — |
| Corner angle | 1.00 (1.17) | 1.00 (1.17) | — | — |
| Swanneck | — | 1.60 (1.87) | — | — |
| Straight with external threads | — | 1.60 (1.87) | — | — |

Environmental and Combustion Controls

Honeywell GmbH

Hardhofweg

74821 MOSBACH

GERMANY

Phone: +49 (6261) 810

Fax: +49 (6261) 81393

<http://ecc.emea.honeywell.com>

EN0H-2101GE25 R0115

January 2015

© 2015 Honeywell International Inc.

Subject to change without notice

Manufactured for and on behalf of the Environmental and Combustion Controls Division of Honeywell Technologies Sàrl, Z.A. La Pièce 16, 1180 Rolle, Switzerland or its Authorized Representative.

Honeywell