

Modulating spring-return actuator with emergency control function for adjusting dampers in technical building installations

- · Air damper size up to approx. 2 m<sup>2</sup>
- Nominal torque 10 Nm
- Nominal voltage AC/DC 24 V
- Control modulating DC (0)0.5...10 V
- Position feedback DC 0.5...10 V
- · with 2 integrated auxiliary switches



# Technical data

lectrical	1 4-4-

Nominal voltage	AC/DC 24 V
Nominal voltage frequency	50/60 Hz
Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V
Power consumption in operation	3.5 W
Power consumption in rest position	2.5 W
Power consumption for wire sizing	5.5 VA
Auxiliary switch	2 x SPDT, 1 x 10% / 1 x 1190%
Switching capacity auxiliary switch	1 mA3 (0.5 inductive) A, AC 250 V
Connection supply / control	Cable 1 m, 4 x 0.75 mm <sup>2</sup>
Connection auxiliary switch	Cable 1 m, 6 x 0.75 mm <sup>2</sup>
Parallel operation	Yes (note the performance data)
Torque motor	Min. 10 Nm
Torque spring return	Min. 10 Nm

#### **Functional data**

Connection auxiliary switch	Cable 1 m, 6 x 0.75 mm <sup>2</sup>
Parallel operation	Yes (note the performance data)
Torque motor	Min. 10 Nm
Torque spring return	Min. 10 Nm
Positioning signal Y	DC 010 V
Positioning signal Y note	Input impedance 100 kΩ
Operating range Y	DC 0.510 V
Position feedback U	DC 0.510 V
Position feedback U note	Max. 0.5 mA
Position accuracy	±5%
Direction of motion motor	Selectable with switch L / R
Direction of motion emergency control	Selectable by mounting L / R
function	
Manual override	By means of hand crank and locking switch
Angle of rotation	Max. 95°
Angle of rotation note	adjustable starting at 33% in 2.5% steps (with
	mechanical end stop)
Running time motor	150 s / 90°
Running time emergency control position	<20 s / 90°
Running time emergency setting position	<20 s @ -2050°C / <60 s @ -30°C
note	
Sound power level motor	40 dB(A)
Spindle driver	Universal spindle clamp 1025.4 mm
Position indication	Mechanical
Service life	Min. 60,000 emergency positions
D : ::	

#### Safety

opinion direct	omitoroal opinior olding romeon in
Position indication	Mechanical
Service life	Min. 60,000 emergency positions
Protection class IEC/EN	III Safety extra-low voltage
Protection class UL	UL Class 2 Supply
Protection class auxiliary switch IEC/EN	II Protective insulated
Degree of protection IEC/EN	IP54
Degree of protection NEMA/UL	NEMA 2, UL Enclosure Type 2
EMC	CE according to 2014/30/EU
Low voltage directive	CE according to 2014/35/EU
Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
Certification UL	cULus according to UL 60730-1A, UL 60730-2-14 and CAN/CSA E60730-1:02
Mode of operation	Type 1.AA.B
Rated impulse voltage supply / control	0.8 kV
Rated impulse voltage auxiliary switch	2.5 kV
Control pollution degree	3
Ambient temperature	-3050°C
· · · · · · · · · · · · · · · · · · ·	

# Spring-return actuator, modulating, AC/DC 24 V, 10 Nm, with 2 integrated auxiliary switches



## **Technical data**

Safety

Weight

Non-operating temperature	-4080°C	
Ambient humidity	95% r.h., non-condensing	
Maintenance	Maintenance-free	
Weight	2.1 kg	

#### Safety notes



- The device must not be used outside the specified field of application, especially not in aircraft or in any other airborne means of transport.
- Outdoor application: only possible in case that no (sea)water, snow, ice, insolation
  or aggressive gases interfere directly with the actuator and that is ensured that the
  ambient conditions remain at any time within the thresholds according to the data
  sheet.
- Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied during installation.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- · Cables must not be removed from the device.
- To calculate the torque required, the specifications supplied by the damper manufacturers concerning the cross-section, the design, the installation site and the ventilation conditions must be observed.
- The device contains electrical and electronic components and must not be disposed
  of as household refuse. All locally valid regulations and requirements must be
  observed.

#### **Product features**

Mode of operation

The actuator is connected with a standard modulating signal of DC 0 ... 10 V and moves the damper to the operating position at the same time as tensioning the return spring. The damper is turned back to the emergency position by spring force when the supply voltage is interrupted.

Simple direct mounting

Simple direct mounting on the damper spindle with an universal spindle clamp, supplied with an anti-rotation device to prevent the actuator from rotating.

Manual override

By using the hand crank the damper can be actuated manually and engaged with the locking switch at any position. Unlocking is carried out manually or automatically by applying the operating voltage.

High functional reliability

The actuator is overload protected, requires no limit switches and automatically stops when the end stop is reached.

Adjustable angle of rotation

Adjustable angle of rotation with mechanical end stops.

Flexible signalization

The actuator has one auxiliary switch with a fixed setting and one adjustable auxiliary switch. They permit a 10% or 11...90% angle of rotation to be signaled.

#### Accessories

FI	lectri	ical	200	222	ories

Description	Туре
Auxiliary switch, 2 x SPDT	S2A-F
Feedback potentiometer, 200 Ohm, incl. installation accessories	P200A-F
Feedback potentiometer 1 kOhm, incl. installation accessories	P1000A-F
Signal converter voltage/current, supply AC/DC 24V	Z-UIC
Digital position indicator for front-panel mounting, 099%, front mass $72 \times 72 \text{ mm}$	ZAD24
Range controller for wall mounting, adjustable electron. Min./max. angle of rotation limitation	SBG24
Positioner for wall mounting, range 0100%	SGA24
Positioner in a conduit box, range 0100%	SGE24
Positioner for front-panel mounting, range 0100%	SGF24
Positioner for wall mounting, range 0100%	CRP24-B1



Z-SF

## **Accessories**

	Description	Туре
Mechanical accessories	Shaft extension 250 mm, for damper spindles Ø 825 mm	AV8-25
	End stop indicator for NFA / SFA	IND-AFB
	Spindle clamp set for NFA/SFA (1", 3/4", 1/2")	K7-2
	Straight ball joint with M8, suitable for damper crank arms KH8	KG10A
	Angled ball joint with M8, suitable for damper crank arms KH8	KG8
	Damper crank arm, for damper spindles	KH8
	Damper crank arm for NFA / SFA, for 3/4" spindles	KH-AFB
	Form fit insert 10x10 mm, for spring return actuators NG	ZF10-NSA-F
	Form fit insert 12x12 mm, for spring return actuators NG	ZF12-NSA-F
	Form fit insert 16x16 mm, for spring return actuators NG	ZF16-NSA-F
	Damper crank arm, for spring return actuators NG	ZG-AFB

#### **Electrical installation**



#### **Notes**


· Connection via safety isolating transformer.


Base plate extensions for NF..A/SF..A

• Parallel connection of other actuators possible. Observe the performance data.

## Wiring diagrams

AC/DC 24 V, modulating

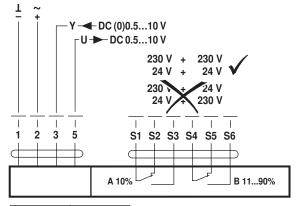



#### Cable colours:

1 = black

2 = red

3 = white

5 = orange

S1 = violet

S2 = red

S3 = white S4 = orange


S5 = pink

S6 = grey



## Operating controls and indicators

### **Auxiliary switch settings**

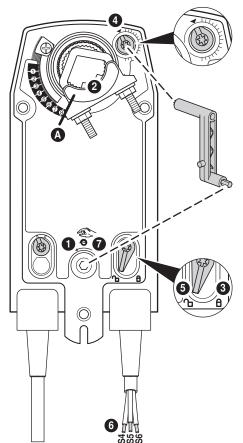



Note

Perform settings on the actuator only in deenergised state.

Manual override

Turn the hand crank until the desired switching position is set.

2 Spindle clamp

Edge line (A) displays the desired switching position of the actuator on the scale.

3 Fasten the locking device

Turn the locking switch to the "Locked padlock" symbol.

4 Auxiliary switch

Turn rotary knob until the notch points to the arrow symbol.

5 Unlock the locking device

Turn the locking switch to the "Unlocked padlock" symbol or unlock with the hand crank.

6 Cable


Connect continuity tester to S4 + S5 or to S4 + S6.

Manual override


Turn the hand crank until the desired switching position is set and check whether the continuity tester shows the switching point.

## Dimensions [mm]

## Spindle length



## Clamping range



## **Dimensional drawings**

